



Xunison Hub D80 5G

Outdoor 5G CPE

AX3000

Wi-Fi 6 Mesh

- 2*2 MU-MIMO
- eSIM embedded
- Speeds up to 2.5 Gbps
- IP67 Waterproof



5G Internet

Anytime, Anywhere

Product Introduction

Xunison Hub D80 is a high-performance outdoor CPE that supports global 5G Sub6G bands, and LTE DL Cat19 UE category with an ability to provide stable data, Wi-Fi, maintenance and management service to home and enterprise users. Besides 5G NR and WLAN functions, it also supports eSIM, SMS, firewall, VPN, QoS and satisfies multi-directional requirements of users.



**Support 802.11
a/b/g/n/ac/ax**

Latest wireless technology with backward compatibility



5G network

Worldwide 5G and LTE-A networks, provides the data rate up to 2.5 Gbps




**High-Performance
Antennas**

Internal 4*4 5G NR/LTE antennas, Internal 2*2 Wi-Fi antennas, multi-frequency coverage



**Security
Assurance**

Stable firewall, Multiple filtering rules Multiple security protocols



**Wi-Fi
Mesh**

Provides increased Wi-Fi coverage and eliminates the dead zones



Bracken Business Park, Bracken Rd, Sandyford Business Park, Sandyford, Dublin, Ireland

www.xunison.com



Xunison Hub D80 5G

SPECIFICATIONS

Data Transmission rates	5G SA Sub-6 GHz: 2.4 Gbps (DL)/ 900 Mbps (UL)
	5G NSA Sub-6 GHz: 3.2 Gbps (DL)/ 550 Mbps (UL)
	LTE: 1.6 Gbps (DL)/ 200 Mbps (UL)
	UMTS: 42 Mbps (DL)/ 5.76 Mbps (UL)
Wireless LAN	Support 802.11 a/ b/g/n /ac/ax standards
	2.4GHz/5GHz frequency range
	20/40/80/160 MHz bandwidth
	Channel adaption
	MSSID (B) + Guest Network
	WPS: PBC/PIN modes
	WPA/WPA2/WPA3 security
	AP isolation/SSID isolation
	SSID and WAN binding
	DL/UL MU-MIMO & OFDMA
Beamforming	
Wi-Fi Mesh	Wi-Fi son/Easy MESH
Wi-Fi Antennas	Internal 2*2 2.4GHz & 2*2 5GHz antennas
	Omni-directional antennas
	Gain: >3dBi
5G NR/LTE Antennas	Internal: 4*4 5G/LTE antennas
	LMB: >2dBi
	HB: >5dBi
	Omni-directional antennas
Wireless Module	Auto/Manual network search
	SIM/BAND/Cell/PLMN Lock
	Optional physical SIM and eSIM
	Traffic statistics
Operation Mode	Bridge
	Route



Bracken Business Park, Bracken Rd, Sandyford Business
Park, Sandyford, Dublin, Ireland

www.xunison.com



Xunison Hub D80 5G

Security	Built in firewall
	Defense of DoS ARP attacks/Port scan
	MAC/URL filtering
	802.1x
Quality of Service control	802.11e WMM
	Classification of service flow*
	Port/VLAN/ IP rate limitation
Network Protocols and Features	Connection modes: PPPoE/DHCP/Static
	IPv4, IPv6, IPv4/IPv6
	DHCP v4/v6 server
	Static (v4/v6) routing
	NAT/ALG/DMZ/virtual server
	ARP/ICMP/DNS proxy
	NTP
	VLAN
VPN: PPTP L2TP/IPSec	
Frequency Bands supported	5GNRNSA/SA: n1/n2/n3/n5/n7/n8/n12/n13/n14/n18/n20/n25/n26/ n28/n29/n30/n38/n40/n41/n48/n66/n70/n71/n75/n76/n77/n78/n79
	LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/ B26/B28/B29/B30/B32/B66/B71
	LTE-TDD: B34/B38/B39/B40/B41/B42/B43/B46(LAA)/B48
	WCDMA: B1/B2/B4/B5/B8/B19
Management	Web UI local management
	TR069 remote management
	Universal Plug and Play (UPnP)
	Online and local software
	update/rollback
	Syslog monitoring
	Local diagnostic



Bracken Business Park, Bracken Rd, Sandyford Business
Park, Sandyford, Dublin, Ireland

www.xunison.com



Xunison Hub D80 5G


Platform	CPU: Qualcomm 2 core A53, 1.0GHz
	Modem: Qualcomm X62
Physical Interface	Optional 2.5GE and GE port
	Optional FXS phone port
	2 x SIM slot
Buttons	WPS/MESH
	Reset
LED indicators	5G NR indicator
	4G LTE indicator
	Wi-Fi indicator
	Power indicator
Physical Specification	Dimensions: L273×W219×H66.9mm
	Operating temperature: -30°C to 65°C
	Storage temperature: -40°C to 70°C
	Humidity: 5% to 95% (non-condensing)
	Protection: IP67
Package Includes	Xunison Hub D80 5G
	Quick Start Guide
	Power Adapter



Bracken Business Park, Bracken Rd, Sandyford Business
Park, Sandyford, Dublin, Ireland

www.xunison.com

DEVICE IMAGES

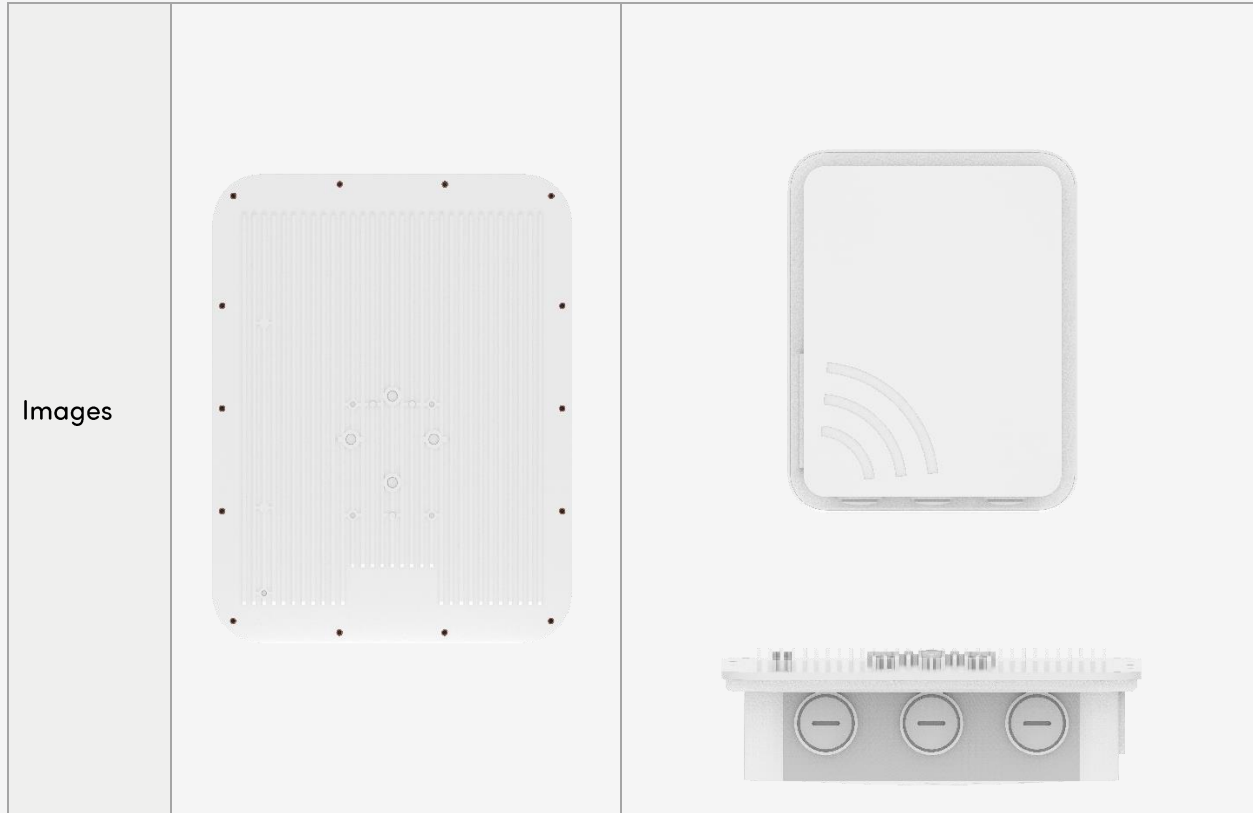

DEVICE IDENTIFICATION

Brand	Xunison
Device name	Xunison Hub D80 5G
SKU:	
Part Number	
Barcode	
Serial Number	